

newline
Connect. Create. Collaborate.

FINANCE



Q SERIES



Antimicrobial Surface



Newline App Store



Secure User Profile



Embedded Blue Light filter



Object Recognition



Optional Camera module



Enhanced Wi-Fi 6



65W Powered USB Type-C

APPLICATION USAGE



Live Share Market Monitoring



Annotation on the Live Content being displayed on Panel



Taking Snapshot and Sharing the same via mail to all the Stake holder from the panel itself within no time

REAL-TIME MARKETING ANALYSIS

newline

BOQ/BOM



Processor to control various devices connected



DTH used for broadcasting various television channels



4 X 4 Switcher having 4 Inputs & 4 Outputs



Newline Display is used for display and annotation interactive



Projector for projecting the content on big screen



VC for Video Conference




Device Tablet controlling a user interface

CONNECTIVITY

IPAD-Processor-DTH-Switcher-Newline Display-Switcher-VC-Projector

REAL-TIME MARKETING ANALYSIS

newline

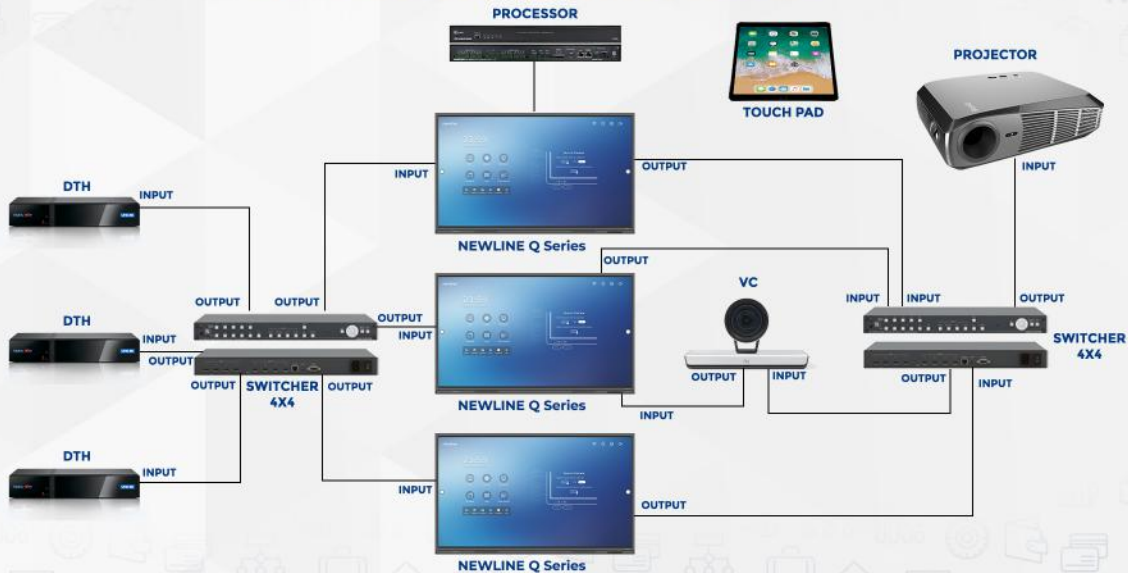

FINANCE TRAINING ROOM

newline



FINANCE TRAINING ROOM

newline



Newline Q series Display is used for Display and Annotation Interactive



Encoders and Decoders for Extending the HDMI Signal through Cat6



Managed Switcher



Wireless Router



Wireless Presenter



VC for Video Conference along with Wide Angle Camera and Speaker Tracking Camera



Receiver RX & TX for Camera cable Expansion



Face Plate for Connecting Laptop




Touch Panel for Controlling an User Interface

CONNECTIVITY

Touch Panel -Managed Switcher-Display-VC Camera-Wireless Presenter

FINANCE TRAINING ROOM

newline

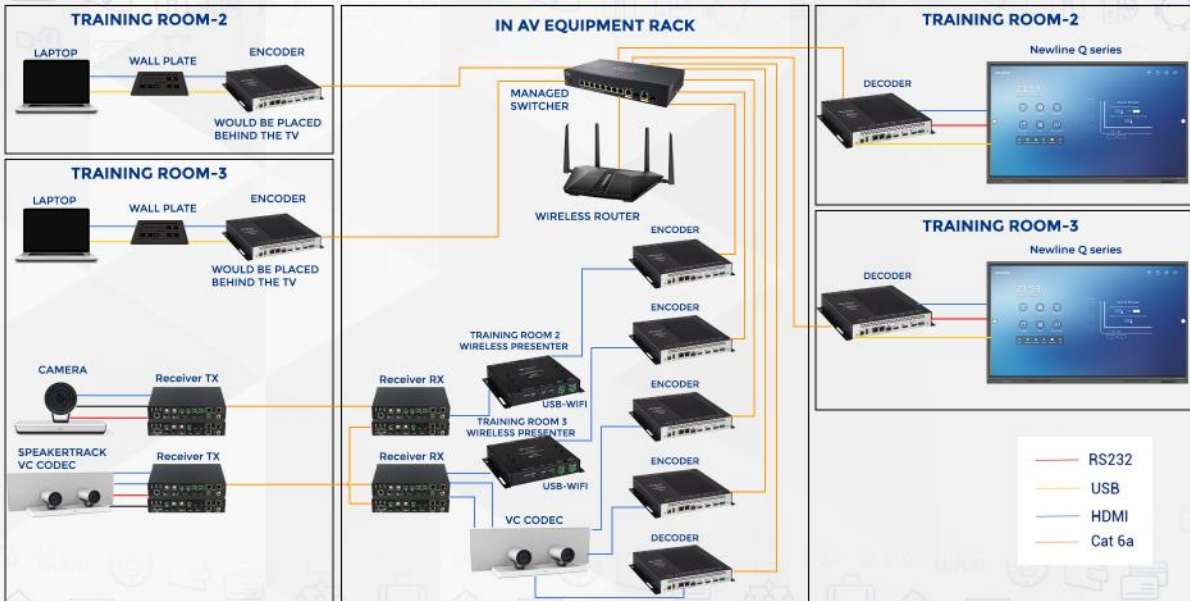

BOARDROOM

newline



BOARDROOM

newline



Newline Q series
Display is used for
Display and Annotation
Interactive



Room Kit Plus for VC



Ceiling Microphone



Wireless Presenter



WP Switcher



Touch Panel

CONNECTIVITY

Touch Panel-Display-VC-Switcher-Wireless Presenter



GENERAL MEETING ROOM

newline



GENERAL TRAINING ROOM

newline



Newline Q series Display is used for display and annotation interactive



Room kit Plus for VC



Wireless Presenter



Table Mics



Touch Panel

CONNECTIVITY

Touch Panel -Display-AM Wireless Presenter

GENERAL TRAINING ROOM



OTHER TRAINING ROOM

newline



NEWLINE Z SERIES WITH OPS PC & WIRELESS KEYBOARD MOUSE

newline



Newline Z Series with OPS PC & wireless Keyboard mouse

SMALL TRAINING ROOM

| NO. | DESCRIPTION | QTY |
|---|--|-----|
| A | | |
| DISPLAY SYSTEM | | |
| 1 | 75" Touch Interactive Display Intuitive Optical Bonding Technology # 0Air gap with 2mm touch glass # Anti finger print coating # Object recognition # Built-in smart android # Advanced User-friendly GUI # Slim and Light weight # 20 Touch, Antiglare, toughened surface # optional OPS-PC # Slim & light weight | 1 |
| 2 | Universal Fixed SD is a versatile wall mount for large display installations. With its smart design the mount can be used for both landscape and portrait installations. With a maxweight capacity of 125kg it can handle screens up to 110". With a wide VESA range of 800x600 it can also handle most VESA specifications large screens are using. | 1 |
| 3 | Supply, installation, testing and commissioning of wireless Presentation system, which supports secure wired and wireless presentation from laptops, smartphones, and tablet devices using the existing Wi-Fi@ wireless network for BYOD connectivity, Should be compatible with Apple@ iOS@, Android™, Windows@, macOS@, Chrome OS™ devices & Miracast@ wireless content projection from Microsoft@ Windows@ 10 devices which allows users to wirelessly share content from a Microsoft Windows 10 device, even if a Wi Fi@ network is not available, should support video frame rate upto Up to 30 fps, Should have one wired HDMI@ input, wired connectivity for sources with resolutions up to HD 1080p60, Should have a HDMI output supporting single HD or WUXGA 1920x1080@60Hz & 1920X1200@60Hz, Should have a bitrate average of 1.4Mbps or better, Should support custom Background and logo of file format of GIF, JPEG, PNG, Should support display device control via CEC, IR, or RS-232, Should be HDCP 1.4 compliant, Should have built-in native integration with Microsoft@ Office 365@ and Outlook@ calendaring applications via Microsoft Exchange for Displaying space availability, meeting details, and other messaging on screen, or a suitable external room scheduling unit to be provided, Should be possible to integrate with lighting keypad and occupancy sensor, Should be able to withstand temperature up to 104° F and Humidity 90% RH (non-condensing), Should be PoE or AC line powered (power adapter to be provided with the unit). | 1 |
| B | | |
| ROOM KIT PLUS 2 CEILING MICS PACKAGE WITH QUAD CAMERA TOUCH 10 | | |
| 1 | Room Kit Plus w/Codec Plus, Quad Camera and Touch 10.with all need accessories | |
| 2 | ESS WITH 8X5XNBD Spark Kit Plus w/Codec Plus, Quad Camera | |
| 3 | Ceiling Microphone array with 10 meter extension cable plus ceiling mounting plate and clips | |
| 4 | ESS WITH 8X5XNBD Cisco TelePresence Ceiling Microphone | |
| 5 | Wall Mount Kit for Codec Plus | |
| C | | |
| HARDWARE & OTHER ITEMS | | |
| 1 | Ultra Slim High-Speed HDMI Flexible Cable 4K UHD HDMI cable supports signals up to 4K@60Hz (4:4:4) UHD , Deep Color, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CECFlexible Standard with locking connectors-Speed HDMI- Speed HDMI Cable 10ft | 1 |
| 2 | Ultra Slim High-Speed HDMI Flexible Cable 4K UHD HDMI cable supports signals up to 4K@60Hz (4:4:4) UHD , Deep Color, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CECFlexible Standard with locking connectors-Speed HDMI- Speed HDMI Cable 3ft | 1 |
| 3 | *Passive Wall Plate – HDMI WP-H1M* | 1 |
| 4 | HDMI Premium High Speed Optical Cables 35 ft Supports data rates up to 18 Gbps, video resolutions up to 4K/60 @ 4:4:4, and HDR | 1 |
| 5 | 6' (1.8 mtr.) HDMI Cables are high-performance cables with molded HDMI connectors at both ends. | 1 |
| 6 | USB 2.0/3.0 Active Extension Cable - A Male to Female 30ft | 1 |
| 7 | 1x2 HDMI Splitter | 1 |

TRAINING ROOM

newline

| NO. | DESCRIPTION | QTY |
|---|--|-----|
| A | | |
| DISPLAY SYSTEM | | |
| 1 | 86" Touch Interactive Display Intuitive Optical Bonding Technology # 0Air gap with 2mm touch glass # Anti finger print coating # Object recognition # Built-in smart android # Advanced User-friendly GUI # Slim and Light weight # 20 Touch, Antiglare, toughened surface # optional OPS-PC # Slim & light weight | 2 |
| 2 | Universal Fixed SD is a versatile wall mount for large display installations. With its smart design the mount can be used for both landscape and portrait installations. With a maxweight capacity of 125kg it can handle screens up to 110". With a wide VESA range of 800x600 it can also handle most VESA specifications large screens are using. | 2 |
| 3 | Supply, installation, testing and commissioning of wireless Presentation system, which supports secure wired and wireless presentation from laptops, smartphones, and tablet devices using the existing Wi-Fi® wireless network for BYOD connectivity. Should be compatible with Apple® iOS®, Android™, Windows®, macOS®, Chrome OS™ devices & Miracast® wireless content projection from Microsoft® Windows® 10 devices which allows users to wirelessly share content from a Microsoft Windows 10 device, even if a Wi-Fi® network is not available, should support video frame rate upto Up to 30 fps. Should have one wired HDMI® input, wired connectivity for sources with resolutions up to HD 1080p60. Should have a HDMI output supporting single HD or WUXGA 1920x1080@60Hz & 1920x1200@60Hz. Should have a bitrate average of 1.4Mbps or better. Should support custom Background and logo of file format of GIF, JPEG, PNG. Should support display device control via CEC, IR, or RS-232. Should be HDCP 1.4 compliant. Should have built-in native integration with Microsoft® Office 365® and Outlook® calendaring applications via Microsoft Exchange for Displaying space availability, meeting details, and other messaging on screen, or a suitable external room scheduling unit to be provided. Should be possible to integrate with lighting keypad and occupancy sensor. Should be able to withstand temperature up to 104° F and Humidity 90% RH (non-condensing). Should be PoE or AC line powered (power adapter to be provided with the unit). | 2 |
| B | | |
| VIDEO & SWITCHING | | |
| 1 | IP base T Transmitter | 6 |
| 2 | IP base T Receiver | 5 |
| 3 | Passive Wall Plate – HDMI Kramer WP-H1M | 4 |
| 4 | Passive Wall Plate - USB | 2 |
| C | | |
| VC SYSTEM CODEC 2 CEILING MICS PRO PACKAGE WITH PRECISION 60 CAMERA AND SPEAKER TRACK CAMERA | | |
| 1 | Webex Room Kit Pro with Precision 60L including Codec Pro, Precision 60 Camera, Touch 10 control unit all accessories included | |
| 2 | ESS WITH 8X5XNBD Room Kit Pro wCodec Pro, P60 Camera and Codec Pro for Auto Expand | |
| 3 | TelePresence SpeakerTrack 60 kit (comes with Cameras, mounting bracket, microphone array and PSU) | |
| 4 | Custom ceiling drop mount for speaker Track camera | 1 |
| 5 | Extender for Speaker Track Camera TX RX set | 1 |
| 6 | Extender for Speaker Precision 60 Camera TX RX set | 1 |

TRAINING ROOM

newline

| NO. | DESCRIPTION | QTY |
|----------|---|-----|
| D | AUDIO SYSTEM & DSP | |
| 1 | Two-way, full-range, coaxial 8" ceiling loudspeaker, 180 W program power , 8 ohm or 70V/100V operation, Frequency Response: 58 Hz – 20 kHz with back can front grill, and mount accessories | 16 |
| 2 | 2 channels, 260 watts/ch at 8Ω, 425 watts/ch at 4Ω, 700 watts/ch at 2Ω, 500 watts/ch at 70V | 2 |
| 3 | Core 110f has 24 I/O + USB, POTS and VoIP simultaneously offering the best cost to I/O ratio in a single 5KU, single chassis product available on the market. The Q-SYS™ Core 110f processor is the latest addition to the Q-SYS Core family, providing a solution for small, single room projects up to the largest Enterprise scale deployments. The continuity of the Q-SYS software based DSP platform the Q-SYS Core 110f to leverage all the features that are available across the entire Q-SYS™ Platform. | 1 |
| 4 | Vocal Set UHF diversity system, with 9.5" TG 500 single receiver and dynamic handheld with TG V50 capsule (cardioid), pilot tone, scan function, incl. power supply, microphone clamp and batteries | 2 |
| 5 | Presenter Set UHF diversity system, with 9.5" TG 500 single receiver, belt pack transmitter and TG L58 lavalier (omni), pilot tone, scan function, incl. power supply, microphone clamp and batteries | 1 |
| 6 | Passive omnidirectional wideband antenna, for wireless systems with BNC connector, incl. stand adaptor | 4 |
| 7 | Wideband antenna amplifier for wireless systems with BNC connector, 5 dB/ 10 dB/ 15 dB switchable gain, feeding from antenna cable or external power supply | 4 |
| 8 | Antenna mounting set for AT 71 and WA-ATDA, 3/8" thread, incl. 5/8" adapter | 4 |
| 9 | Belden 7810A Coax RG-8 Type Cable - 1000 Foot | 1 |
| 10 | 6-way wideband antenna splitter, 2-way antenna combiner for wireless systems with BNC-connector, 8V DC bias | 1 |
| 11 | passive 2-way combiner for wireless systems with BNC connector | 2 |
| E | CONTROL SYSTEM | |
| 1 | Control System with power supply, The Crestron® CP3N is an enterprise-class control system with a dedicated Control Subnet port. Featuring the 3-Series® control engine, the CP3N forms the core of any modern networked home or commercial building, managing and integrating all the disparate technologies throughout your facility to make life easier, greener, more productive, and more enjoyable. | 1 |
| 2 | Mobile Device Control Application (control from Iphone, Ipad & Android devices) | |
| 3 | 9.7" Touch PAD 32GB I Pad with Wi-Fi | |
| 4 | Wall Surface mount +PoE injector+USB cable including all accessories. | 1 |
| 5 | 28 port Network Switch | 1 |

TRAINING ROOM

newline

| NO. | DESCRIPTION | QTY |
|-----|---|-----|
| F | HARDWARE & OTHER ITEMS | |
| 1 | Ultra Slim High-Speed HDMI Flexible Cable 4K UHD HDMI cable supports signals up to 4K@60Hz (4:4:4) UHD , Deep Color, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CECFlexible Standard with locking connectors-Speed HDMI- Speed HDMI Cable 6ft | 6 |
| 2 | Ultra Slim High-Speed HDMI Flexible Cable 4K UHD HDMI cable supports signals up to 4K@60Hz (4:4:4) UHD , Deep Color, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CECFlexible Standard with locking connectors-Speed HDMI- Speed HDMI Cable 10ft | 2 |
| 3 | Ultra Slim High-Speed HDMI Flexible Cable 4K UHD HDMI cable supports signals up to 4K@60Hz (4:4:4) UHD , Deep Color, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CECFlexible Standard with locking connectors-Speed HDMI- Speed HDMI Cable 3ft | 10 |
| 4 | High-Speed HDMI Cable with Ethernet ; 4K@60Hz (4:2:0) ; Supports Deep Colour , Multi-Channel Audio Support ; With pro-grade heavy-duty construction, triple-shield bonded pairs and K-Lock connectors ; 24K gold-plated, corrosion-resistant - 35 ft. | 2 |
| 5 | 6' (1.8 mtr.) HDMI Cables are high-performance cables with molded HDMI connectors at both ends. | 2 |
| 6 | USB 2.0/3.0 USB Cable - A-Male to A-Male 3ft | 2 |
| 7 | USB 2.0/3.0 USB Cable - A-Male to A-Male 3ft | 2 |
| 8 | Audio/Control Cable Plenum Single 20 AWG shielded twisted pair in mtrs | 50 |
| 9 | Microphone Cable Plenum Single 18 AWG shielded in mtrs | 70 |
| 10 | 2 core Speaker Cable Plenum in mtrs 14 AWG | 250 |
| 11 | Shielded Twisted Pair Cable for Video Switching /Scaling System as per OEM recommendation Plenum in 305 mtrs spool plenum Shielded Digital Twisted Pair Cable for - 1000' (305 m) spool | 1 |
| 12 | USB 2.0/3.0 Active Extension Cable - A Male to Female 30ft | 2 |
| 13 | Bulk Cable & Connectors(Including usb Cable) & Other Accessories | 1 |
| 14 | Wireless router | 1 |

11-PAX MEETING ROOM

| NO. | DESCRIPTION | QTY |
|----------|--|-----|
| A | DISPLAY SYSTEM | |
| 1 | 86" Touch Interactive Display Intuitive Optical Bonding Technology # 0Air gap with 2mm touch glass # Anti finger print coating # Object recognition # Built-in smart android # Advanced User-friendly GUI # Slim and Light weight # 20 Touch, Antiglare, toughened surface # optional OPS-PC # Slim & light weight | 1 |
| 2 | Universal Fixed SD is a versatile wall mount for large display installations. With its smart design the mount can be used for both landscape and portrait installations. With a maxweight capacity of 125kg it can handle screens up to 110". With a wide VESA range of 800x600 it can also handle most VESA specifications large screens are using. | 1 |
| 3 | Supply, installation, testing and commissioning of wireless Presentation system, which supports secure wired and wireless presentation from laptops, smartphones, and tablet devices using the existing Wi-Fi® wireless network for BYOD connectivity. Should be compatible with Apple® iOS®, Android™, Windows®, macOS®, Chrome OS™ devices & Miracast® wireless content projection from Microsoft® Windows® 10 devices which allows users to wirelessly share content from a Microsoft Windows 10 device, even if a Wi Fi® network is not available, should support video frame rate upto Up to 30 fps, Should have one wired HDMI® input, wired connectivity for sources with resolutions up to HD 1080p60, Should have a HDMI output supporting single HD or WUXGA 1920x1080@60Hz & 1920x1200@60Hz. Should have a bitrate average of 1.4Mbps or better. Should support custom Background and logo of file format of GIF, JPEG, PNG, Should support display device control via CEC, IR, or RS-232. Should be HDCP 1.4 compliant, Should have built-in native integration with Microsoft® Office 365® and Outlook® calendaring applications via Microsoft Exchange for Displaying space availability, meeting details, and other messaging on screen, or a suitable external room scheduling unit to be provided, Should be possible to integrate with lighting keypad and occupancy sensor, Should be able to withstand temperature up to 104° F and Humidity 90% RH (non-condensing). Should be PoE or AC line powered (power adapter to be provided with the unit). | 1 |
| B | ROOM KIT PLUS 3 MICS PACKAGE WITH QUAD CAMERA TOUCH 10 | |
| 1 | Room Kit Plus w/Codec Plus, Quad Camera and Touch 10. | |
| 2 | ESS WITH BX5XNBD Spark Kit Plus w/Codec Plus, Quad Camera | |
| 3 | Cisco Table Microphone with Jack plug | |
| 4 | Extension cable for the table microphone | |
| 5 | ESS WITH BX5XNBD Cisco Table Microphone with Jack plug | |
| 6 | Wall Mount Kit for Codec Plus | |
| 7 | Cisco Multi-head Cable 9 meters (4K, USB-C, HDMI, miniDP) | |
| C | HARDWARE & OTHER ITEMS | |
| 1 | Multi-head Cable 9 meters (4K, USB-C, HDMI, miniDP) | 2 |
| 2 | Ultra Slim High-Speed HDMI Flexible Cable 4K UHD HDMI cable supports signals up to 4K@60Hz (4:4:4) UHD , Deep Color, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CECFlexible Standard with locking connectors-Speed HDMI- Speed HDMI Cable 3ft | 1 |
| 3 | HDMI (F/F) Gender Changer | 2 |
| 4 | Ultra Slim High-Speed HDMI Flexible Cable 4K UHD HDMI cable supports signals up to 4K@60Hz (4:4:4) UHD , Deep Color, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CECFlexible Standard with locking connectors-Speed HDMI- Speed HDMI Cable 6ft | 2 |
| 5 | High-Speed HDMI Cable with Ethernet ; 4K@60Hz (4:2:0) ; Supports Deep Colour , Multi-Channel Audio Support ; With pro-grade heavy-duty construction, triple-shield bonded pairs and K-Lock connectors ; 24K gold-plated, corrosion-resistant - 25 ft. | 2 |
| 6 | 6' (1.8 mtr.) HDMI Cables are high-performance cables with molded HDMI connectors at both ends. | 1 |
| 7 | USB 2.0/3.0 Active Extension Cable - A Male to Female 30ft | 1 |
| 8 | 1x2 HDMI Splitter | 1 |

Q SERIES

SPECIFICATIONS

| PRODUCT | TT-5521Q | TT-6521Q | TT-7521Q | TT-8621Q | TT-9821Q |
|------------------|---------------|---------------|------------------|----------------|----------------|
| SCREEN SIZE | 55" | 65" | 75" | 86" | 98" |
| ACTIVE AREA | 1210 X 680 MM | 1432 X 807 MM | 1652 X 930 MM | 1893 X 1069 MM | 2163 X 1221 MM |
| WEIGHT (KG) | 38 | 39 | 52 | 65 | 85 |
| TOUCH TECHNOLOGY | | | IR | | |
| RESOLUTION | | | 3840 × 2160 (4K) | | |
| VIEWING ANGLE | | | 178° | | |
| BACKLIGHT | | | DLED | | |

The background features a repeating pattern of blue triangles of various shades, creating a geometric, low-poly effect. Interspersed among these triangles are small, light blue line-art icons representing various business and technology concepts, such as houses, charts, gears, and people. The overall color palette is monochromatic, consisting of different tones of blue.

newline

www.newlineinteractive.in

THANK YOU!