
newline

ACTIVE LED Display

DV AIO

(All-In-One)

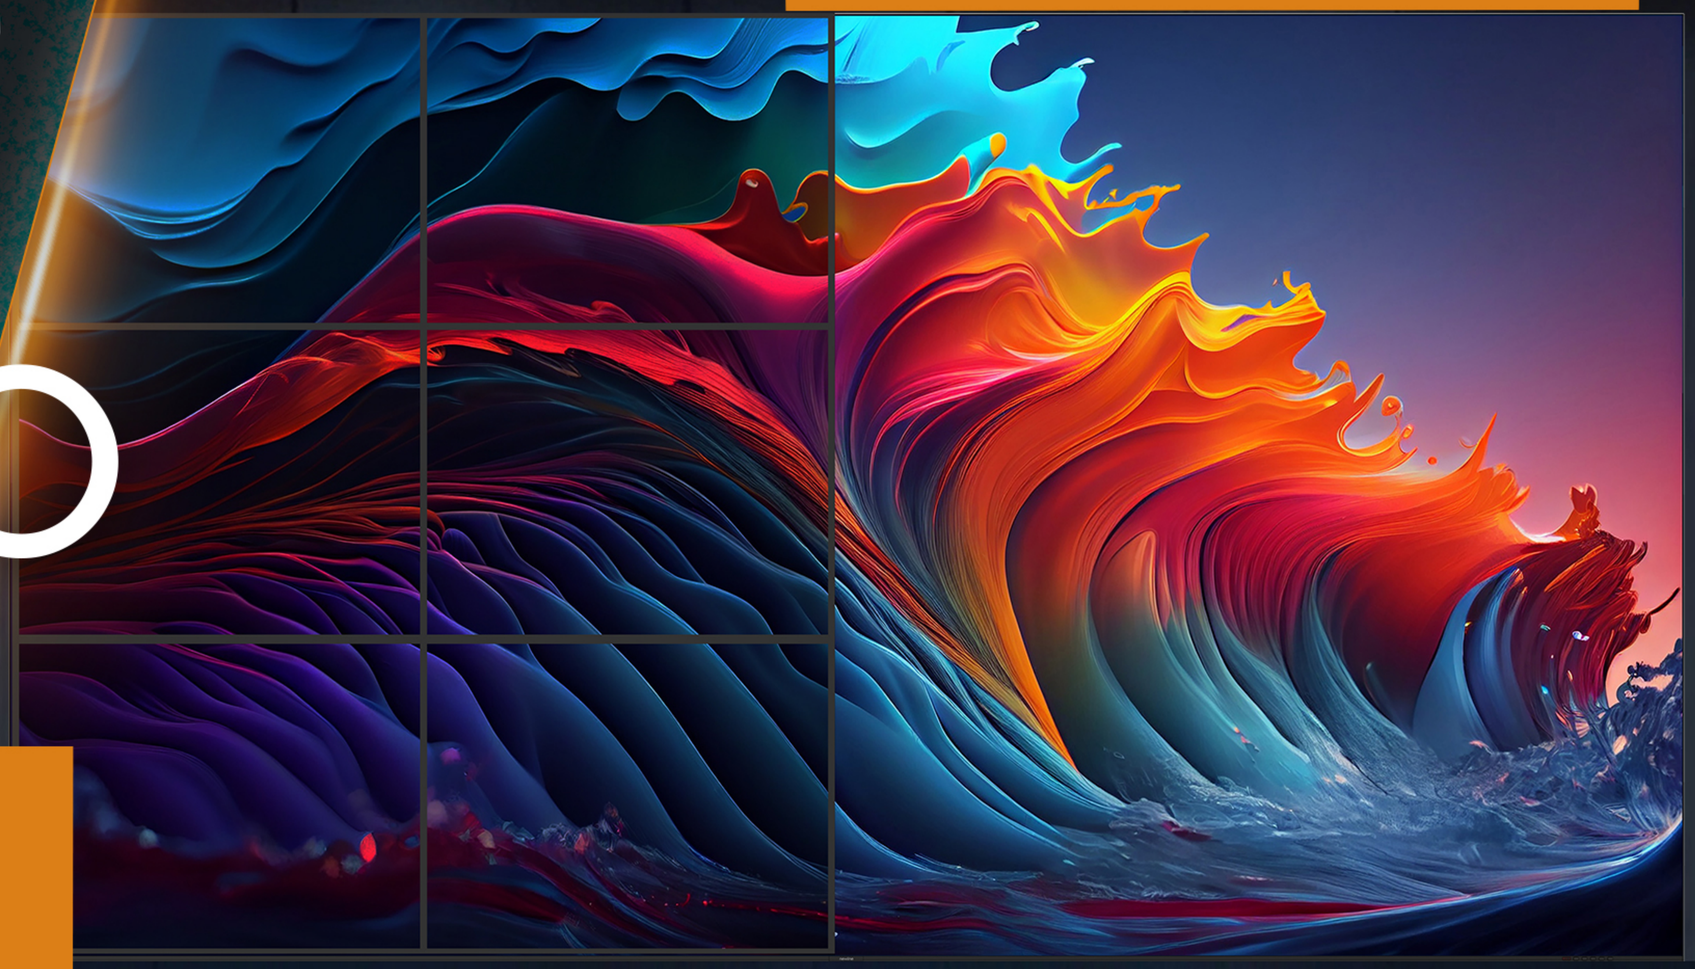

ALL-IN-ONE POWER.
ENDLESS POSSIBILITIES.



Sleek Design

Full HD 1080

True Full HD Resolution

COB Technology

Ultra-High Contrast

Ultra Fine Pixel Pitch

NDM+ Remote Management

Easy Front Maintenance

Wake-on-LAN & Wake-on-Wi-Fi

ELITE PERFORMANCE

Meet the DV AIO, the most advanced all-in-one direct view LED solution from Newline. Designed to simplify installation while elevating visual performance, DV AIO delivers stunning true full HD resolution with extremely fine pixel pitch powered by COB (Chip on Board) technology for exceptional contrast, durability, and image uniformity. Available in three impressive sizes–108”, 136”, and 163”–this turnkey display brings seamless integration, reduced maintenance, and immersive clarity to any space.

From classrooms and lecture halls to corporate boardrooms and experience centers, the DV AIO transforms large-format presentation into a sleek, reliable, and powerful visual centerpiece–ready to inspire, engage, and perform from day one.

DV AIO

	DV-10826-AIO	DV-13626-AIO	DV-16326-AIO
Size	108"	136"	163"
Pixel Pitch(mm)	0.9p/1.2p / 1.5p / 1.8p		
Lights Welding Type	COB		
Resolution (mm)(WxH)	1920x1080p		
Aspect Ratio	16:9		
Module Size (mm)(WxHxD)	3000x1687.5		
Brightness (nits)	1000		
Pixel Type	RGB		
Android	Yes		
Interface	HDMIx3、3.5mm Jackx1、USB3.0x1、USB2.0x1、RJ45x1	HDMIx3、3.5mm Jackx1、USB3.0x1、USB2.0x1、RJ45x1	HDMIx3、3.5mm Jackx1、USB3.0x1、USB2.0x1、RJ45x1
Wifi	Wifi-5G ×1、Wifi-2.4G ×1、Wifi-AP ×1	Wifi-5G ×1、Wifi-2.4G ×1、Wifi-AP ×1	Wifi-5G ×1、 Wifi-2.4G×1、Wifi- AP x1
Remote Control	Infrared/Bluetooth	Infrared/Bluetooth	Infrared/Bluetooth
Audio	5Wx2	5Wx2	5Wx2
Overall Weight (Without Base)(kg)	80kg	120kg	172kg
Viewing Angle (H/V)	170°/170°	170°/170°	170°/170°
Max. Power Consumption (W)	≤1500	≤2300	≤3280
Avg. Power Consumption (W)	≤500	≤760	≤1093
Working Voltage (V)	AC100~240（50~60Hz）	AC100~240（50~60Hz）	AC100~240 (50~60Hz)
Frame Rate (Hz)	50/60	50/60	50/60
Refresh Rate (Hz)	3840-7680	3840-7680	3840-7680
Gray Scale (bit)	14~16	14~16	14~16
Operation Temp (□)	-10~+40	-10~+40	-10~+40
Operation Humidity (RH)	10%~80%,no condensation	10%~80%,no condensation	10%~80%, no condensation
Lifetime (H)	1,00,000	1,00,000	1,00,000
Maintenance Mode	Front	Front	Front
IP Level	IP40	IP40	IP40
Bracket Type	Mobile/Wall-mount	Mobile/Wall-mount	Mobile/Wall-mount

newline

1-800-419-0309
www.newlineinteractive.in

Chennai

Door Nos:684 to 690, Unit No 3B2, 10th Floor, Seethakathi Business Centre, Thousand Lights, Anna Salai, Chennai – 600 006.

Gujarat

104, 1st Floor, Shilp Arista, Opposite Stellar, Sindhu Bhavan Road, Thaltej, Ahmedabad 380015, Gujarat