


QULTRA SERIES

New
Launch

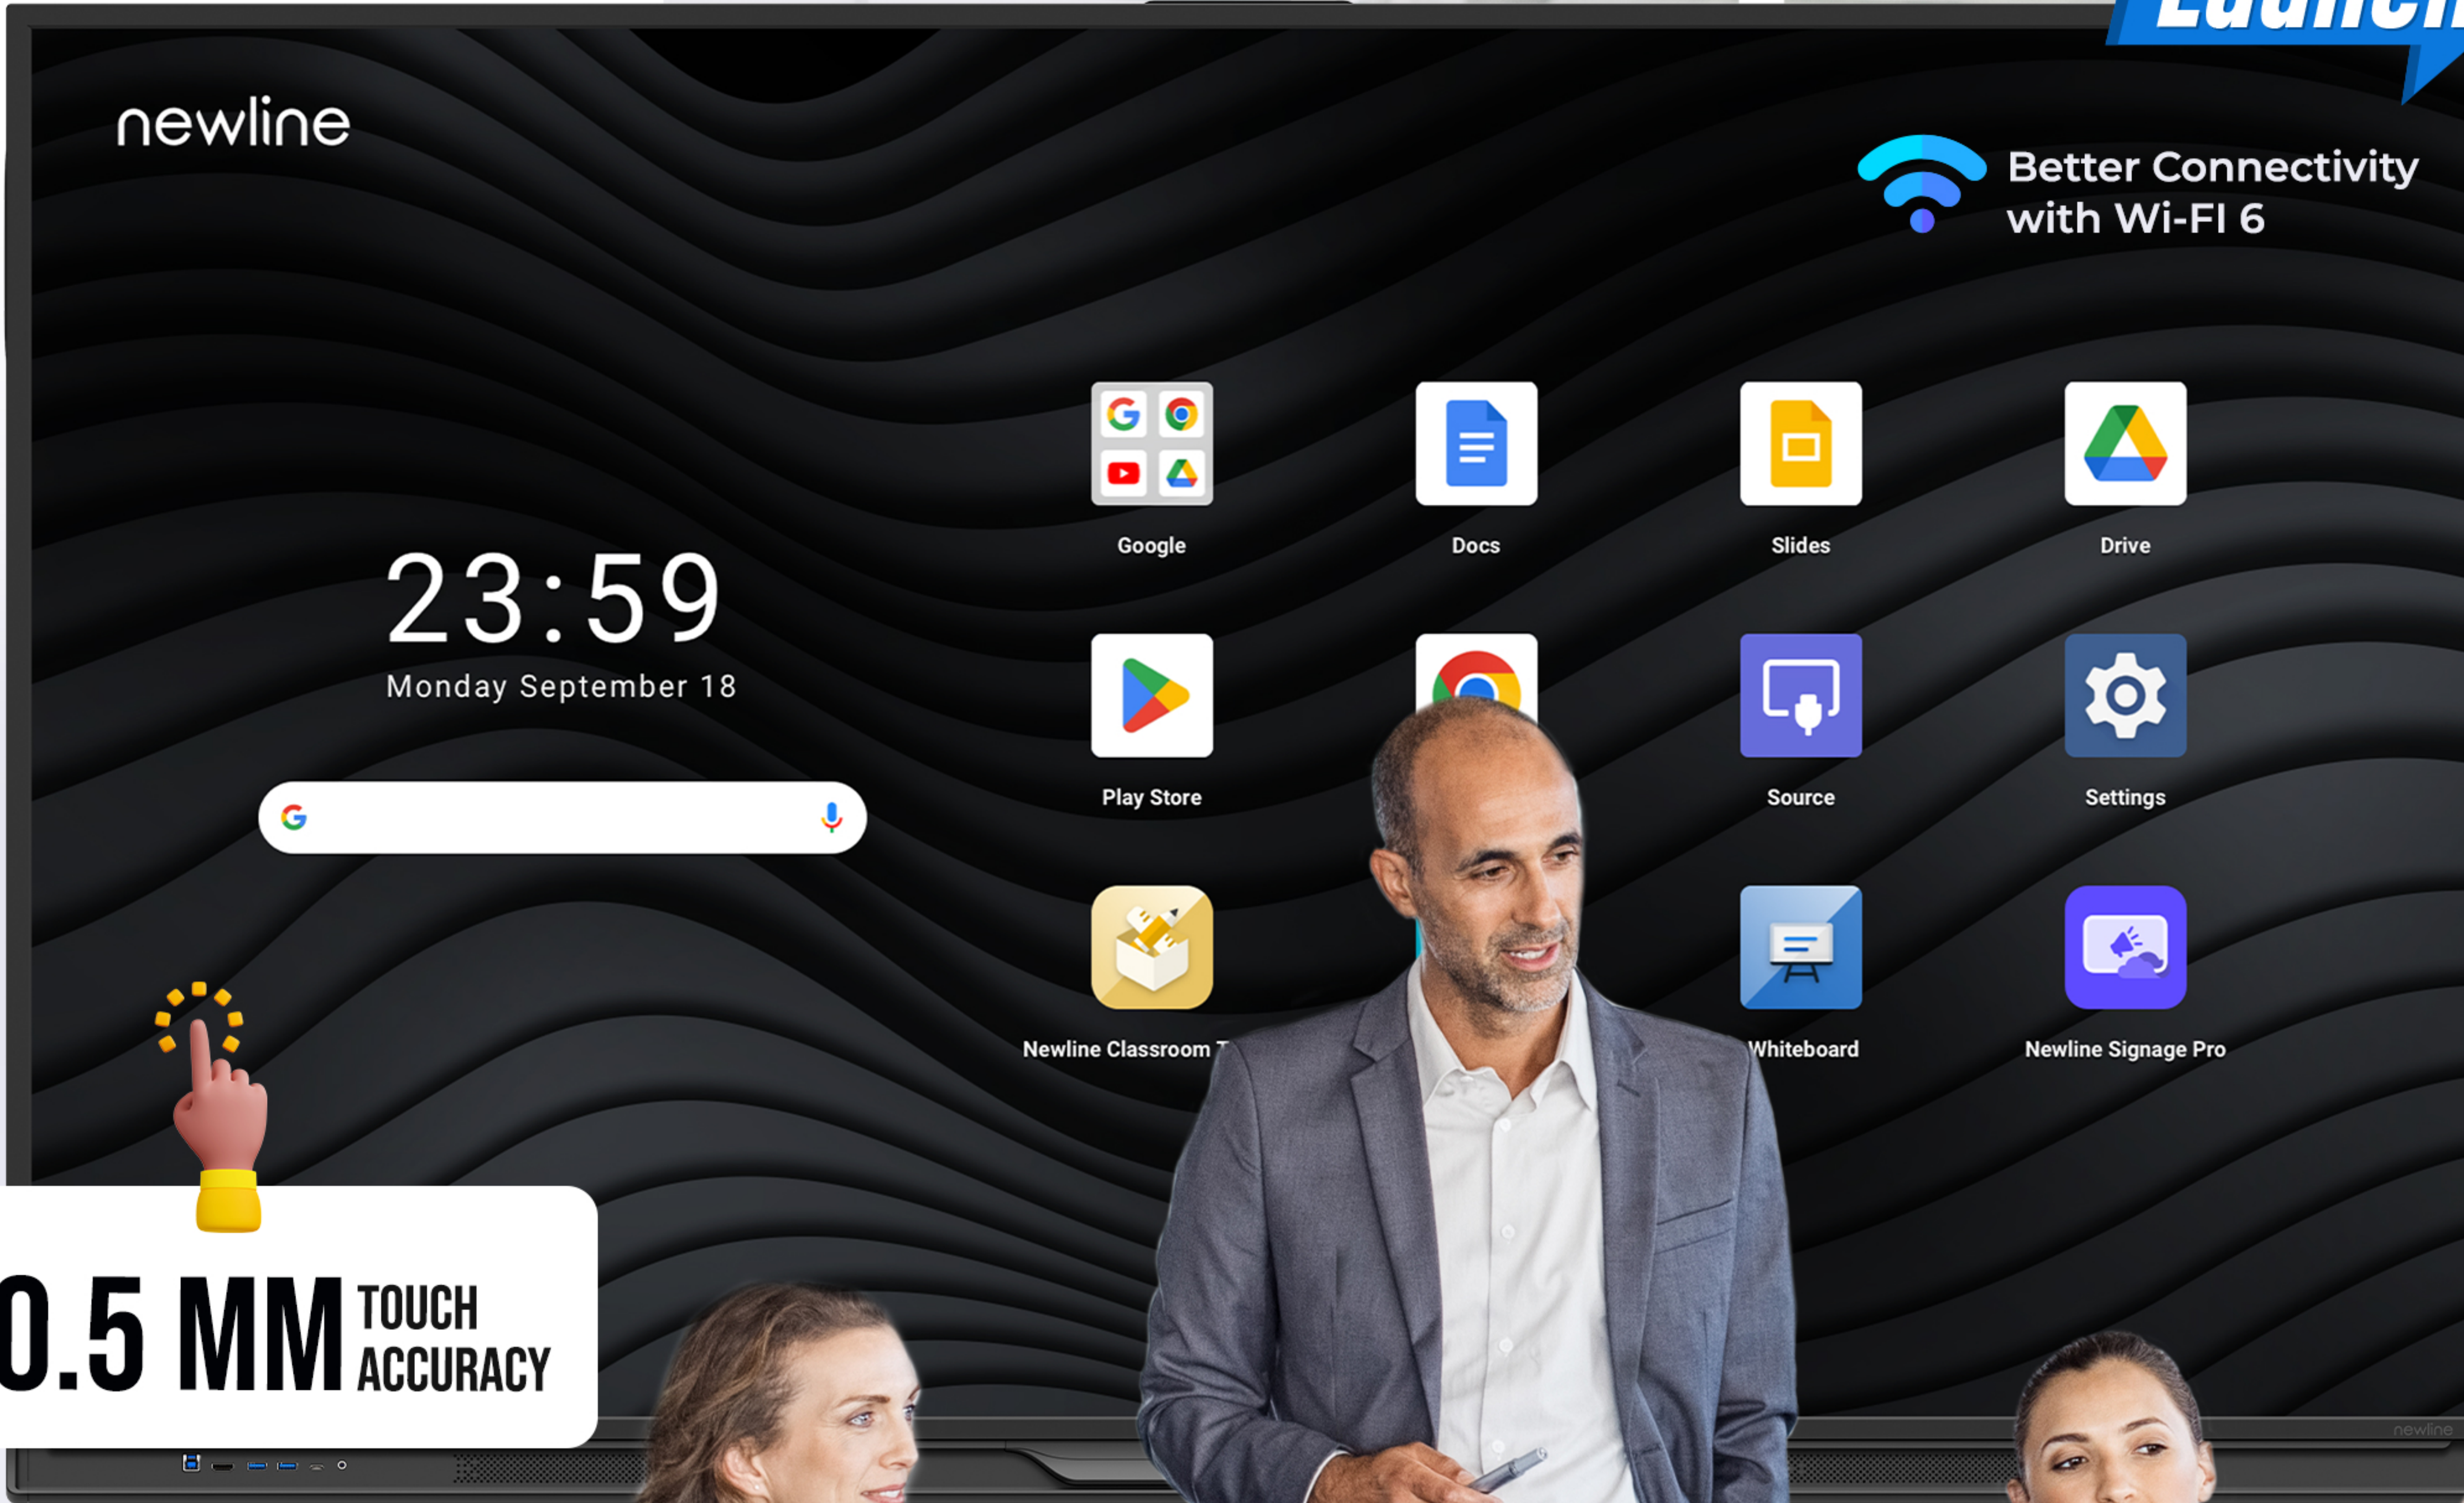

±0.5 MM TOUCH
ACCURACY

ANDROID
16



GOOGLE
EDLA CERTIFIED



OFFICIAL
GOOGLE PLAYSTORE



Speaker
20W x2



Resolution
3840 x 2160 (4K)



Color Depth
10bit(8bit+FRC)



Refresh Rate
120 Hz



Brightness
>=550 cd/m²



Display Life Time
>50,000 hours



Response Time(Typ.)
4ms

Advanced Processing Architecture




RK3588 Chipset


Powered by the RK3588 chipset, the Q-Elite delivers responsive performance, smooth multitasking, and reliable operation for classrooms, boardrooms, and collaborative environments.

Octa-Core Processing Performance

Powered by an Octa-Core processor featuring

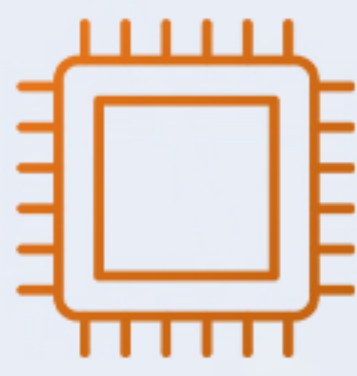

4 × ARM
A76 cores
(Up to 2.4 GHz)

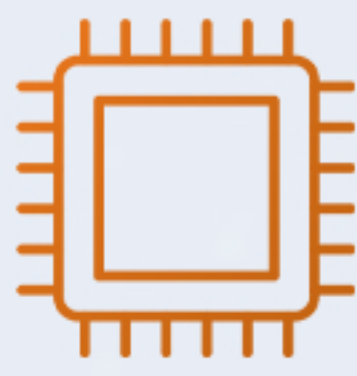

4 × ARM
A55 cores

This balanced architecture ensures smooth application performance, fast content loading, responsive touch interaction, and dependable multitasking.

ARM G610 MC4 Graphics

The integrated ARM G610 MC4 GPU delivers smooth graphics performance for high-resolution content, multimedia presentations, and interactive applications.

Dedicated AI Processing (9 TOPS NPU)

The integrated Neural Processing Unit (NPU) provides up to 9 TOPS of AI computing capability, supporting advanced AI workloads and intelligent application performance.

Memory Built For Demanding Workloads

16 GB RAM

High-capacity memory enables seamless multitasking, allowing multiple applications to run efficiently while maintaining smooth system performance.

128 GB Internal Storage

Generous onboard storage provides ample space for applications, educational resources, business presentations, multimedia content, and important files.

Google EDLA Certified



Official Google Experience

Powered by Android 16 and Google EDLA Certification, Q-Elite provides access to the official Google Play Store and popular Google applications.



Google
Play Store



Google
Drive



Google
Docs



Google
Meet



Google
Classroom

Enjoy an official Google experience with access to trusted Google services and applications.

Premium Interactive Experience



Zero Bonding
Technology



High-Precision
Touch



600Hz Touch
Scan Rate



Anti-Glare, Anti-Fingerprint &
Antimicrobial Tempered Glass



9H Tempered
Glass Protection

Designed for an Enhanced Viewing Experience

4K Ultra HD Display

Delivers sharp image clarity and vibrant visuals, ideal for presentations, digital learning, and teamwork.

120Hz Refresh Rate

Provides smoother visual performance for dynamic content, scrolling, annotation, and interactive applications.

550 cd/m² Brightness

Maintains bright, clear visuals for excellent visibility across classrooms, meeting rooms, and collaborative spaces.

Hardware Blue Light Filter

Designed with a built-in hardware blue light filter to support comfortable viewing during extended usage.

IMMERSIVE AUDIO

20W × 2 Bottom Front Speakers

Dual 20W bottom front speakers deliver clear, powerful audio for classrooms, conference rooms, presentations, and hybrid collaboration.



Professional Connectivity

Designed to integrate seamlessly into modern educational and enterprise environments.

- » USB Type-C (65W PD Full Function)
- » DisplayPort 1.2
- » USB Type-C (15W PD Full Function)
- » Wi-Fi 6
- » USB Type-C Out (4K @ 60Hz)
- » Bluetooth 5.2
- » HDMI 2.1
- » OPS Expansion Slot

Engineered For Collaboration

Up to 50 Simultaneous Touch Points

Supports up to 50 touch points on both Android and Windows, enabling collaborative learning, brainstorming, and interactive teamwork.

Responsive Touch Experience

Designed to deliver smooth, accurate, and responsive interaction for writing, annotation, presentations, and collaborative workflows.

MODEL	TT-5526QULT	TT-6526QULT	TT-7526QULT	TT-8626QULT	TT-9826QULT
DISPLAY					
Active Screen Size	55"	65"	75"	86"	98"
Screen Type	LCD (Direct LED Backlight)	LCD (Direct LED Backlight)	LCD (Direct LED Backlight)	LCD (Direct LED Backlight)	LCD (Direct LED Backlight)
Display Area	55":1209.60mm (H) x 680.40mm (V)	65":1428.48mm (H) x 803.52mm (V)	75":1650.24mm(H) x 928.26mm(V)	86":1895.04mm(H) x 1065.96mm(V)	98":2158.85mm(H) x 1214.35mm(V)
Display Ratio	16:9	16:9	16:9	16:9	16:9
Resolution	3840 x 2160 (4K)	3840 x 2160 (4K)	3840 x 2160 (4K)	3840 x 2160 (4K)	3840 x 2160 (4K)
Refresh Rate	120 Hz	120 Hz	120 Hz	120 Hz	120 Hz
Colors	1.07Billion	1.07Billion	1.07Billion	1.07Billion	1.07Billion
Color Depth	10bit(8bit+FRC)	10bit(8bit+FRC)	10bit(8bit+FRC)	10bit(8bit+FRC)	10bit(8bit+FRC)
Brightness	>=550 cd/m²	>=550 cd/m²	>=550 cd/m²	>=550 cd/m²	>=550 cd/m²
Contrast Ratio(Typ.)	15000:1	15000:1	15000:1	15000:1	15000:1
Color Gamut(Typ.)	NTSC. ≥85%	NTSC. ≥85%	NTSC. ≥85%	NTSC. ≥85%	NTSC. ≥85%
Response Time(Typ.)	4ms	4ms	4ms	4ms	4ms
Hareware Blue light filter	Yes	Yes	Yes	Yes	Yes
Viewing Angle	178°	178°	178°	178°	178°
Display Life Time	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours

MODEL	TT-5526QULT	TT-6526QULT	TT-7526QULT	TT-8626QULT	TT-9826QULT
SMART SYSTEM					
Chipset	RK3588	RK3588	RK3588	RK3588	RK3588
CPU	ARM A76*4 + A55*4 (Octa Core) Max 2.4GHz	ARM A76*4 + A55*4 (Octa Core) Max 2.4GHz	ARM A76*4 + A55*4 (Octa Core) Max 2.4GHz	ARM A76*4 + A55*4 (Octa Core) Max 2.4GHz	ARM A76*4 + A55*4 (Octa Core) Max 2.4GHz"
GPU	ARM G610 MC4	ARM G610 MC4	ARM G610 MC4	ARM G610 MC4	ARM G610 MC4
RAM	16 GB	16 GB	16 GB	16 GB	16 GB
ROM	128 GB	128 GB	128 GB	128 GB	128 GB
On Board TF Card	Optional	Optional	Optional	Optional	Optional
Android Version	Android 16	Android 16	Android 16	Android 16	Android 16
OS Version	EDLA	EDLA	EDLA	EDLA	EDLA
Top Camera Port	Yes, USB 3.0, 5V/2A	Yes, USB 3.0, 5V/2A	Yes, USB 3.0, 5V/2A	Yes, USB 3.0, 5V/2A	Yes, USB 3.0, 5V/2A
OPS Slot	Yes	Yes	Yes	Yes	Yes
WiFi Module Model	Built-in	Built-in	Built-in	Built-in	Built-in
WiFi Version	WiFi 6 (IEEE 802.11ax) : 2.4G+5G WiFi 5: 2.4G+5G	WiFi 6 (IEEE 802.11ax) : 2.4G+5G WiFi 5: 2.4G+5G	WiFi 6 (IEEE 802.11ax) : 2.4G+5G WiFi 5: 2.4G+5G	WiFi 6 (IEEE 802.11ax) : 2.4G+5G WiFi 5: 2.4G+5G	WiFi 6 (IEEE 802.11ax) : 2.4G+5G WiFi 5: 2.4G+5G
Bluetooth	BT5.2 Must use in dongle for AI remote	BT5.2 Must use in dongle for AI remote	BT5.2 Must use in dongle for AI remote	BT5.2 Must use in dongle for AI remote	BT5.2 Must use in dongle for AI remote
AV INTERFACE					
Front I/O	1 x Type C (PD 65W, full functions)	1 x Type C (PD 65W, full functions)	1 x Type C (PD 65W, full functions)	1 x Type C (PD 65W, full functions)	1 x Type C (PD 65W, full functions)
Front I/O	1 x HDMI In (2.1, 4K@60Hz,HDCP2.3)	1 x HDMI In (2.1, 4K@60Hz,HDCP2.3)	1 x HDMI In (2.1, 4K@60Hz,HDCP2.3)	1 x HDMI In (2.1, 4K@60Hz,HDCP2.3)	1 x HDMI In (2.1, 4K@60Hz,HDCP2.3)
Front I/O	1 x USB Touch 3.0 (Only USB 2.0)	1 x USB Touch 3.0 (Only USB 2.0)	1 x USB Touch 3.0 (Only USB 2.0)	1 x USB Touch 3.0 (Only USB 2.0)	1 x USB Touch 3.0 (Only USB 2.0)
Front I/O	2 x USB 3.2 Gen 1	2 x USB 3.2 Gen 1	2 x USB 3.2 Gen 1	2 x USB 3.2 Gen 1	2 x USB 3.2 Gen 1
Front I/O	1 x Mic In	1 x Mic In	1 x Mic In	1 x Mic In	1 x Mic In
Rear I/O	2 x HDMI In (2.1, 4K@60Hz,HDCP2.3),1*ARC	2 x HDMI In (2.1, 4K@60Hz,HDCP2.3),1*ARC	2 x HDMI In (2.1, 4K@60Hz,HDCP2.3),1*ARC	2 x HDMI In (2.1, 4K@60Hz,HDCP2.3),1*ARC	2 x HDMI In (2.1, 4K@60Hz,HDCP2.3),1*ARC
Rear I/O	1 x DP1.2 (4K@60Hz)	1 x DP1.2 (4K@60Hz)	1 x DP1.2 (4K@60Hz)	1 x DP1.2 (4K@60Hz)	1 x DP1.2 (4K@60Hz)
Rear I/O	1 x Type C (PD 15W, full functions)	1 x Type C (PD 15W, full functions)	1 x Type C (PD 15W, full functions)	1 x Type C (PD 15W, full functions)	1 x Type C (PD 15W, full functions)
Rear I/O	1 x Type C Out (no PD, 4K@60Hz)	1 x Type C Out (no PD, 4K@60Hz)	1 x Type C Out (no PD, 4K@60Hz)	1 x Type C Out (no PD, 4K@60Hz)	1 x Type C Out (no PD, 4K@60Hz)
Rear I/O	2 x USB 3.2 Gen 1 Public	2 x USB 3.2 Gen 1 Public	2 x USB 3.2 Gen 1 Public	2 x USB 3.2 Gen 1 Public	2 x USB 3.2 Gen 1 Public
Rear I/O	1 x USB 3.2 Gen 1 Android	1 x USB 3.2 Gen 1 Android	1 x USB 3.2 Gen 1 Android	1 x USB 3.2 Gen 1 Android	1 x USB 3.2 Gen 1 Android
Rear I/O	3 x USB Touch 3.0 (Only USB 2.0)	3 x USB Touch 3.0 (Only USB 2.0)	3 x USB Touch 3.0 (Only USB 2.0)	3 x USB Touch 3.0 (Only USB 2.0)	3 x USB Touch 3.0 (Only USB 2.0)
Rear I/O	1 x HDMI Out (2.1 4K@60Hz) HDCP 2.3)	1 x HDMI Out (2.1 4K@60Hz) HDCP 2.3)	1 x HDMI Out (2.1 4K@60Hz) HDCP 2.3)	1 x HDMI Out (2.1 4K@60Hz) HDCP 2.3)	1 x HDMI Out (2.1 4K@60Hz) HDCP 2.3)
Rear I/O	1 x S/PDIF Out	1 x S/PDIF Out	1 x S/PDIF Out	1 x S/PDIF Out	1 x S/PDIF Out
Rear I/O	1 x Line Out	1 x Line Out	1 x Line Out	1 x Line Out	1 x Line Out
Rear I/O	1 x RS232	1 x RS232	1 x RS232	1 x RS232	1 x RS232
Rear I/O	1 x Mic In	1 x Mic In	1 x Mic In	1 x Mic In	1 x Mic In
Rear I/O	1 x LAN In	1 x LAN In	1 x LAN In	1 x LAN In	1 x LAN In
Rear I/O	1 x LAN Out	1 x LAN Out	1 x LAN Out	1 x LAN Out	1 x LAN Out
SPEAKER					
Speaker Position	Bottom Front	Bottom Front	Bottom Front	Bottom Front	Bottom Front
Speaker Power (Max.)	20Wx2	20Wx2	20Wx2	20Wx2	20Wx2
Speaker Rated Impedance	6.0Ω	6.0Ω	6.0Ω	6.0Ω	6.0Ω
Speaker Freq.Response	90Hz-20KHz SPL -10dB	90Hz-20KHz SPL -10dB	90Hz-20KHz SPL -10dB	90Hz-20KHz SPL -10dB	90Hz-20KHz SPL -10dB
Output S.P.L.	79dB ±3dB	79dB ±3dB	79dB ±3dB	79dB ±3dB	79dB ±3dB
TOUCH TECHNOLOGY					
Glass Surface Treatment	Anti-Glare+Anti-Fingerprint + Antimicrobial Tempered Glass	Anti-Glare+Anti-Fingerprint + Antimicrobial Tempered Glass	Anti-Glare+Anti-Fingerprint + Antimicrobial Tempered Glass	Anti-Glare+Anti-Fingerprint + Antimicrobial Tempered Glass	Anti-Glare+Anti-Fingerprint + Antimicrobial Tempered Glass
Glass Hardness	9H(Pencil)	9H(Pencil)	9H(Pencil)	9H(Pencil)	9H(Pencil)
Glass Thickness	55" :3.2 mm	65" :3.2 mm	75" :3.2 mm	86" :3.2 mm	98":4 mm
Glass Transparency	≥88%	≥88%	≥88%	≥88%	≥88%
Glass Haze	15-25%	15-25%	15-25%	15-25%	15-25%
Bonding Type	Zero bonding	Zero bonding	Zero bonding	Zero bonding	Zero bonding
Touch Soluttion	IR	IR	IR	IR	IR
Touch Accuracy	±0.5mm (90% of center part)	±0.5mm (90% of center part)	±0.5mm (90% of center part)	±0.5mm (90% of center part)	±0.5mm (90% of center part)
Touch Scan Rate	600Hz	600Hz	600Hz	600Hz	600Hz
Touch Points	Android 50 & Windows 50	Android 50 & Windows 50	Android 50 & Windows 50	Android 50 & Windows 50	Android 50 & Windows 50
ELECTRICAL PARAMETERS					
Working Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Working Power Consumption	55"≤ 150 W	65"≤ 150 W	75"≤ 240 W	86"≤ 270 W	98"≤ 300 W
Power Consumption (Standby Mode)	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W
TRANSPORTATION / STORAGE					
Storage Temperature&Humidity	-20~60°C 0~90%RH (non-condensing)	-20~60°C 0~90%RH (non-condensing)	-20~60°C 0~90%RH (non-condensing)	-20~60°C 0~90%RH (non-condensing)	-20~60°C 0~90%RH (non-condensing)
Working Temperature/Humidity	0~40°C 20~80%RH (non-condensing)	0~40°C 20~80%RH (non-condensing)	0~40°C 20~80%RH (non-condensing)	0~40°C 20~80%RH (non-condensing)	0~40°C 20~80%RH (non-condensing)
Installation Method (optional)	wall-mounted / mobile stand	wall-mounted / mobile stand	wall-mounted / mobile stand	wall-mounted / mobile stand	wall-mounted / mobile stand
Outline Dimension (without wall mount bracket)	55":Top & Left & Right (17.4mm) /Botton (60.9mm)	65"/75"/86" :Top & Left & Right (17.8mm) /Botton (60.9mm)	65"/75"/86" :Top & Left & Right (17.8mm) /Botton (60.9mm)	65"/75"/86" :Top & Left & Right (17.8mm) /Botton (60.9mm)	98" :Top & Left & Right (20.8mm) /Botton (71mm)
Outline Dimension (without wall mount bracket)	1280*109*799mm	1487*121*909mm	1709*122*1033mm	1955*122*1171mm	2237*120*1345mm
Packing Dimension	1414x185x915mm	1634x185x1015mm	1844x207x1145mm	2094x227x1280mm	2385x285x1593mm
VESA Mount Pattern	400*400mm	600*400mm	800*400mm	800*400mm	800*600mm
Net Weight	55":28.0 KG	65":33.5 KG	75":44.5 KG	86":59.5 KG	98":105.0 KG
Gross Weight	55":35.5 KG	65":42 KG	75":56.5 KG	86":71.5 KG	98":125.5 KG