


# TRU TOUCH i75

REVOLUTIONIZING  
THE EDUCATION SECTOR  
IN INDIA

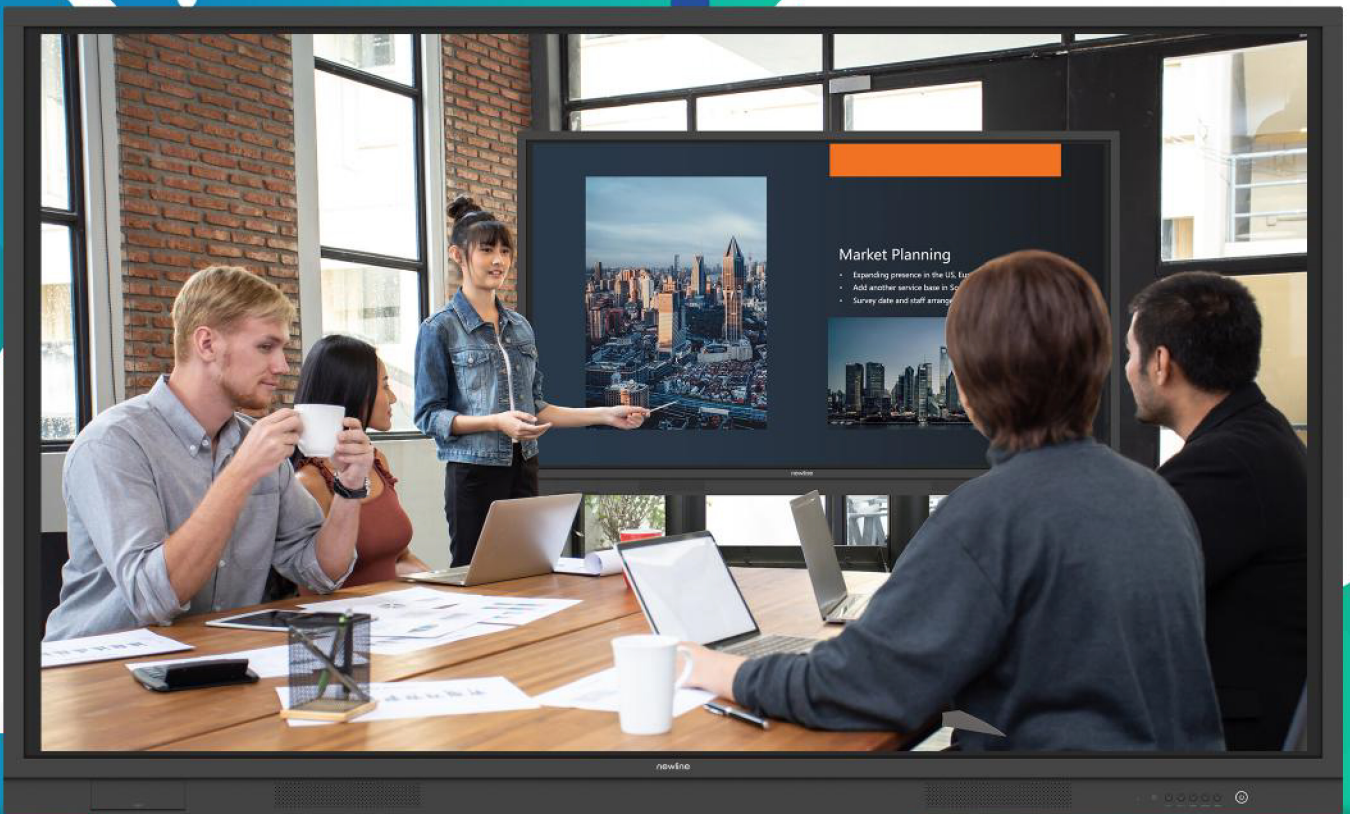

# PRODUCT SPECIFICATION

DISPLAY		TT-7519I		COMPATIBILITY	
PANEL SIZE	75"	CVBS	480I,		
TYPE/TECH	LED BACKLIGHT	HDMI	480I, 480P,720P,1080I,1080P		
DISPLAY AREA (MM)	1650.24MM*928.26MM	CONTROLS			
ASPECT RATIO	16:09			INPUT: MANUAL , SOURCE, MUTE ,VOLUME -; VOLUME +	
NATIVE RESOLUTION	3840*2160 (4K)			PC, EMBD PLAYER, AV, VGA, HDMI1, HDMI2, HDMI3	
COLORS	1.07 BILLION(10 BIT)			LIGHT:1-10	
BRIGHTNESS	450NITS			VOLUME:0-100	
CONTRAST RATIO	15000:1			VGA: H POSITION, V POSITION, PHASE, CLOCK, ZOOM, AUTO ADJUST, WRITING MODE	
RESPONSE TIME	<8MS			PICTURE: BRIGHTNESS, CONTRAST, HUE, SHARPNESS, COLOR TEMP, ZOOM, WRITING MODE	
REFRESH RATE	60HZ			FRONT CONNECTORS	
VIEWING ANGLES	H = 178, V = 178 TYP.			2 X USB 3.0 FOR OPS, , 1 X HDMI, 1 X TOUCH, 1 X MIC	
BACKLIGHT LIFE	30,000 HOURS TYP.			MULTIMEDIA	
GLASS THICKNESS	4MM			IMAGE: JPEG, BMP, PNG	
GLASS HARDNESS	9H (PENCIL) , 7(MOHS)			VIDEO: MPEG2, MPEG4, H264, HEVC(H.265)	
SURFACE TREATMENT	ANTIGLARE (7H)			AUDIO: WMA, MP3, M4A, (AAC)	
ORIENTATION	LANDSCAPE	POWER			
OPERATING SYSTEM				VOLTAGE	
OPERATING SYSTEM		NON- ANDRIOD		AC 100-240V, 50/60HZ	
TOUCH				CONSUMPTION	
TYPE/ TECH		INFRA RED		300 (TYP)	
TOUCH RESOLUTION		32767 X 32767		< 0.5 W ("STANDBY MODE")	
TOUCH POINT		20 POINT MULTI TOUCH		VESA	
OS SUPPORT		WINDOWS / LINUX / ANDROID / MAC		VESA PATTERN	
INPUT				800*400	
HDMI		X3 ( 2.0*2 IN REAR SIDE. 1.4*1 IN FRONT)		OPERATING CONDITIONS	
TOUCH USB		X2 (TYPE B)		TEMPERATURE (° C)	
RGB / VGA		X1		0°C TO 40°C	
AUDIO		X1 PC AUDIO(3.5 MM)		HUMIDITY	
YPBPR		X1		20% ~ 80% NON-CONDENSING	
MIC(MICROPHONE)		X1 ( FRONT SIDE)		DIMENSIONS	
AV IN		X1 (CVBS+L+R)		)W X H X D(	
OPS		INTEL STANDARD OPS SLOT SUPPORT 4K@60HZ		PHYSICAL (INCH / MM)	
OUTPUT				1895X247X1193	
AUDIO		X1 EARPHONE OUT		WEIGHT	
AV OUT		YES		NET (LB / KG)	
CONTROL				59KG+/-2KG	
RS232		X1		GROSS (LB / KG)	
				77KG+/- 2KG	
USB				PACKAGE CONTENTS	
TYPE A		X2 ( 3.0) FRONT		1. DISPLAY 2. POWER CABLE 3. USB CABLE	
TYPE A		X1 (2.0) REAR (FW UPGRADE)		4. REMOTE CONTROL WITH BATTERIES 5. STYLUS (X1)	
SPEAKERS				6. USER GUIDE	
		15WX2		FLICKER FREE	
				FLICKER FREE	
				YES	
SYSTEM				SYSTEM	
				CHIPSET	
				MSD3458HB	
				CPU	
				MIPS ADVANCED MULTI-CORE CPU	
				RAM	
				2GBIT DDR3 MCP	
				ROM	
				64M BIT NORFLASH	
CERTIFICATES				OTHERS	
				REGULATIONS	
				BIS , EMC,LVD, ROHS	
				NEWLINE CAST WINDOWS (OPTIONAL)	
				EASILY SHARE YOUR SCREEN FROM ANY DEVICE	
				Present and share content onto your Newline display wirelessly from any device with a single click. It works with all modern laptops, tablets, phones and support for your browser. Enjoy two-way collaboration as you control and annotate from the display or from your own device.	
				NEWLINE BROADCAST WINDOWS (OPTIONAL)	
				SHARE CONTENT TO AUDIENCES OF ANY SIZE HASSLE-FREE BROADCASTING	
				Share your screen in real-time from your Newline display to any participant connected. Easily invite up to 200 participants to connect their own device from the meeting room, classroom, lecture theatre or any other place in the world with a network connection	



**CHENNAI**  
Door Nos:684 to 690, Unit No 382, 10th Floor,  
Seethakathi Business Centre, Thousand Lights,  
Anna Salai, Chennai - 600 006.

**GUJARAT**  
104, 1st Floor, Shilp Arista, Opposite  
Stellar, Sindhu Bhavan Road, Thalaj,  
Ahmedabad 380015, Gujarat

**DELHI**  
Unit No. A-717, 7th Floor,  
DLF Tower A, Jasola District Centre,  
New Delhi- 110025

**KOLKATA**  
RAIKVA Tower 3A, Ram Mohan  
Mullick Garden Lane, 3rd Floor, Suit No - 309  
Kolkata, West Bengal 700010



**MUMBAI**  
1st Floor,B-107, Kanakia Wall Street,  
Chakala, Andheri Kurla Road,  
Andheri East Mumbai-400059, Maharashtra.



1-800-419-0309 | www.newlineinteractive.in