


newline
Connect. Create. Collaborate.



TRU TOUCH i85

REVOLUTIONIZING
THE EDUCATION SECTOR
IN INDIA

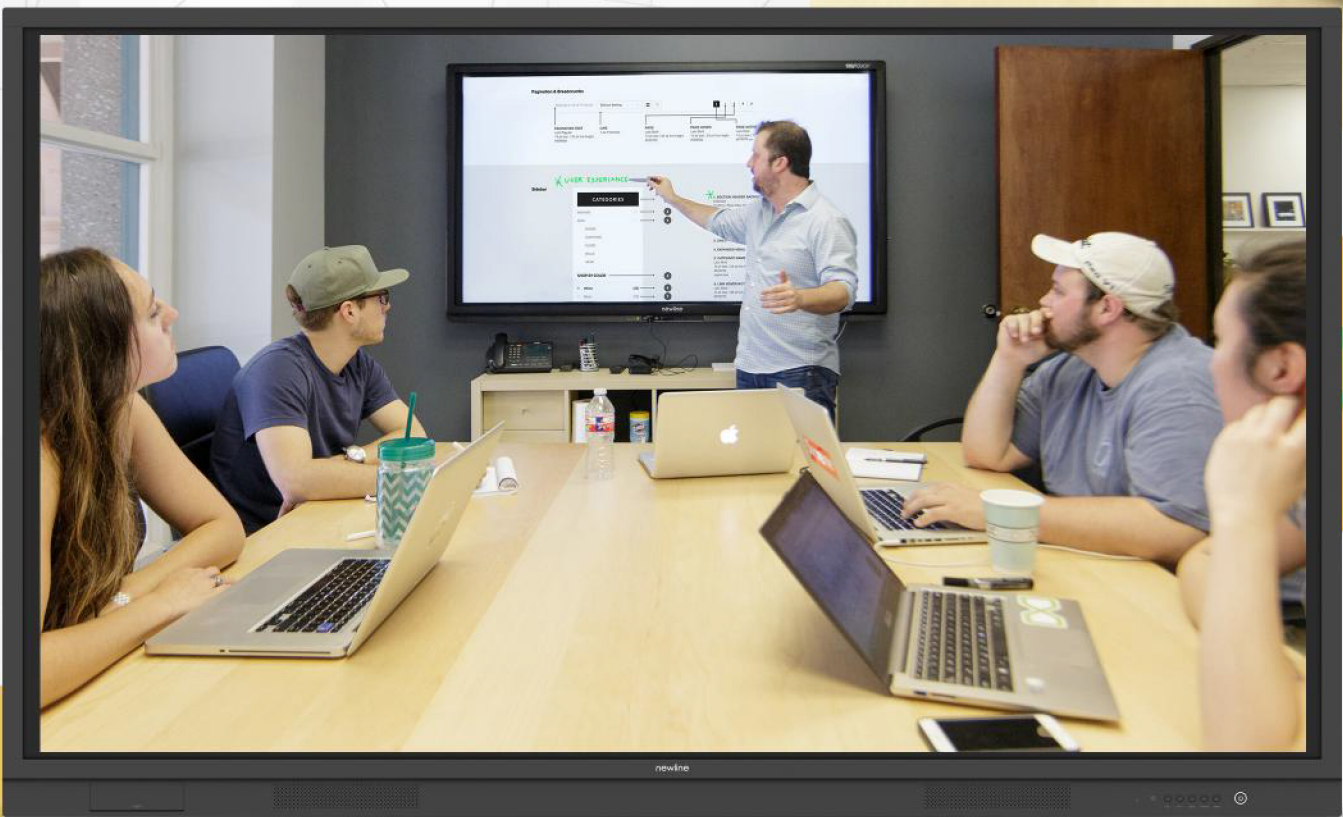

PRODUCT SPECIFICATION

DISPLAY		TT-8519IS		COMPATIBILITY	
PANEL SIZE	85"	CVBS	480I,		
TYPE/TECH	LED BACKLIGHT	HDMI	480I, 480P,720P,1080I,1080P		
DISPLAY AREA (MM)	1872MM*1053MM	CONTROLS			
ASPECT RATIO	16:09			INPUT: MANUAL , SOURCE, MUTE ,VOLUME -, VOLUME +	
NATIVE RESOLUTION	3840*2160 (4K)			PC, EMBD PLAYER, AV, VGA, HDMI1, HDMI2, HDMI3	
COLORS	1.07 BILLIONB(10 BIT)			LIGHT:1~10	
BRIGHTNESS	>450NITS			VOLUME:0~100	
CONTRAST RATIO	15000:1	PHYSICAL- TOP OSD		VGA: H POSITION, V POSITION, PHASE, CLOCK, ZOOM, AUTO ADJUST, WRITING MODE	
RESPONSE TIME	<4MS			PICTURE: BRIGHTNESS, CONTRAST, HUE, SHARPNESS, COLOR TEMP, ZOOM, WRITING MODE	
REFRESH RATE	120 HZ	FRONT CONNECTORS		2 X USB 3.0 FOR OPS, , 1 X HDMI, 1 X TOUCH, 1 X MIC	
VIEWING ANGLES	H = 178, V = 178 TYP.	MULTIMEDIA		IMAGE: JPEG, BMP, PNG VIDEO: MPEG2, MPEG4, H264, HEVC(H.265) AUDIO: WMA, MP3, M4A, (AAC)	
BACKLIGHT LIFE	50,000 HOURS TYP.	POWER			
GLASS THICKNESS	4MM	VOLTAGE	AC 100-240V, 50/60HZ		
GLASS HARDNESS	9H (PENCIL) , 7(MOHS)	CONSUMPTION	Maximum ≤450W < 0.5 W ("STANDBY MODE")		
SURFACE TREATMENT	ANTI GLARE (7H)	VESA			
ORIENTATION	LANDSCAPE	VESA PATTERN	800*400		
OPERATING SYSTEM		OPERATING CONDITIONS			
OPERATING SYSTEM	NON- ANDRIOD	TEMPERATURE (° C)	0°C TO 40°C		
TOUCH		HUMIDITY	20% ~ 80% NON-CONDENSING		
TYPE/ TECH	INFRA RED	DIMENSIONS)W X H X D(
TOUCH RESOLUTION	32767 X 32767	PHYSICAL (INCH / MM)	2119X1309X275		
TOUCH POINT	20 POINT MULTI TOUCH	WEIGHT			
OS SUPPORT	WINDOWS / LINUX / ANDROID / MAC	NET (LB / KG)	69KG		
INPUT		GROSS (LB / KG)	86KG		
HDMI	X3 (2.0*2 IN REAR SIDE. 1.4*1 IN FRONT)	PACKAGE CONTENTS		1. DISPLAY 2. POWER CABLE 3. USB CABLE 4. REMOTE CONTROL WITH BATTERIES 5. STYLUS (X1) 6. USER GUIDE	
TOUCH USB	X2 (TYPE B)	SYSTEM			
RGB / VGA	X1	CHIPSET	MSD3458HB		
AUDIO	X1 PC AUDIO(3.5 MM)	CPU	MIPS ADVANCED MULTI-CORE CPU		
YPBPR	X1	RAM	2GBIT DDR3 MCP		
MIC(MICROPHONE)	X1 (FRONT SIDE)	ROM	64M BIT NORFLASH		
AV IN	X1 (CVBS+L+R)	CERTIFICATES			
OPS	INTEL STANDARD OPS SLOT SUPPORT 4K@60HZ	REGULATIONS	BIS		
OUTPUT		OTHERS			
AUDIO	X1 EARPHONE OUT	NEWLINE CAST WINDOWS (OPTIONAL)	EASILY SHARE YOUR SCREEN FROM ANY DEVICE Present and share content onto your Newline display wirelessly from any device with a single click. It works with all modern laptops, tablets, phones and support for your browser. Enjoy two-way collaboration as you control and annotate from the display or from your own device.		
AV OUT	YES	NEWLINE BROADCAST WINDOWS (OPTIONAL)	SHARE CONTENT TO AUDIENCES OF ANY SIZE HASSLE-FREE BROADCASTING Share your screen in real-time from your Newline display to any participant connected. Easily invite up to 200 participants to connect their own device from the meeting room, classroom, lecture theatre or any other place in the world with a network connection		
CONTROL					
RS232	X1				
USB					
TYPE A	X2 (3.0) FRONT				
TYPE A	X1 (2.0) REAR (FW UPGRADE)				
SPEAKERS					
	15WX2				



CHENNAI
Door Nos:684 to 690, Unit No 3B2, 10th Floor,
Seethakathi Business Centre, Thousand Lights,
Anna Salai, Chennai - 600 006.

GUJARAT
104, 1st Floor, Shilp Arista, Opposite
Stellar, Sindhu Bhavan Road, Thaltej,
Ahmedabad 380015, Gujarat

DELHI
Unit No. A-717, 7th Floor,
DLF Tower A, Jasola District Centre,
New Delhi- 110025

KOLKATA
RAIKVA Tower 3A, Ram Mohan
Mullick Garden Lane, 3rd Floor, Suit No - 309
Kolkata, West Bengal 700010



MUMBAI
1st Floor,B-107, Kanakia Wall Street,
Chakala, Andheri Kurla Road,
Andheri East Mumbai-400059, Maharashtra.



1-800-419-0309 | www.newlineinteractive.in