

newline

Connect. Create. Collaborate.



Android 8.0.0




OPS Slot



Embedded Microphone

NT85

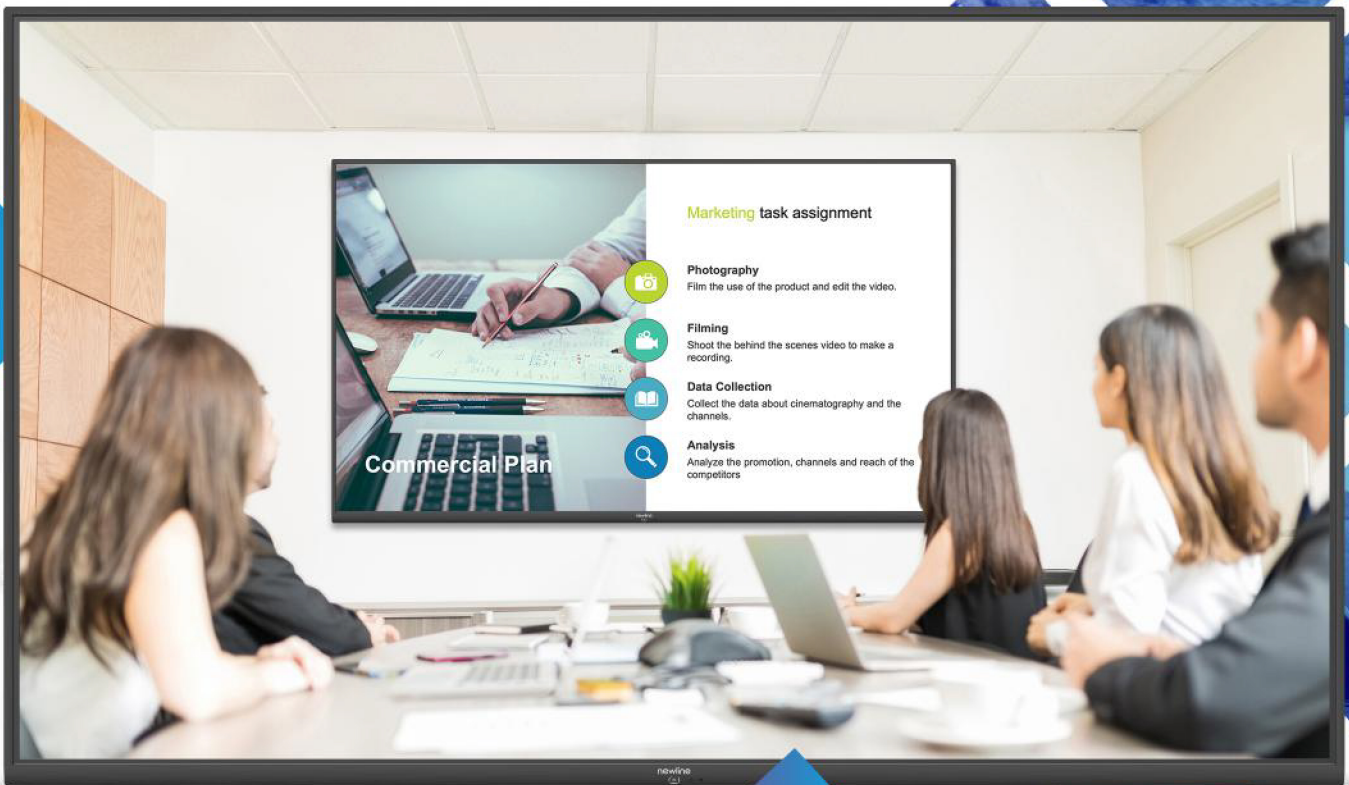

COMMERCIAL GRADE DISPLAYS

CAST Present wirelessly from any network with a single click.
Share video, links, and files from any device.

BROADCAST Broadcast content or present wirelessly from a personal device,
and invite up to 200 participants to connect from their own.

PRODUCT SPECIFICATION

DISPLAY	TT-8519NT	INTERNAL MICROPHONE	
ACTIVE SCREEN SIZE	1872X1053MM	CHIPSET	MT8516
PANEL SIZE	85"	COMMUNICATION INTERFACE	USB,LINE-IN
BACKLIGHT	LED	SUPPLY VOLTAGE	18V
DISPLAY AREA	1872X1053MM	TYPE	ANALOG MICROPHONE
DISPLAY RATIO	16:9	AUDIO SPEC.	16KHZ, 16BITS PCM, EXTENDABLE 24BITS, 48BITS
RESOLUTION	3840X2160	ARRAY	6
DISPLAY COLORS	10BIT(D), 1.07BILLON COLORS	ADAPTERIZATION DISTANCE	6-8M
LCD BRIGHTNESS	≥500 CD/M ²	FUNCTION	ECHO CANCELLATION, BEAMFORMING, NOISE REDUCTION, REVERB REMOVAL
CONTRAST	5000:1		
RESPONSE TIME	8 MS		
VIEWING ANGLE	178°		
LIFE TIME	≥50000 HOURS		
ELECTRICAL		SMART SYSTEM	
POWER CONSUMPTION	≤450W	CHIPSET	HI3751 V810
WORKING VOLTAGE	AC100-240V	CPU	DUAL-CORE CORTEX A73 AND DUAL-CORE CORTEX A53
		GPU	QUAD-CORE MALIG51 GPU
		RAM	3GB DDR4
		ROM	16GB
		ANDROID VERSION	8.0
		MULTIMEDIA FILE FORMATS SUPPORT	VIDEO: AVS, AVS+, H263, H264, H265, MPEG-1, MPEG-2, MPEG-4, MPEG-4, VC1, VP8, VP9, MJPEG AUDIO: AAC, ADPCM, DRA, FLAC, MID, MPEG, PCM, VORBIS IMAGE: JPEG, BMP, PNG
SPEAKER		SPECIALITY	
SPEAKER POSITION	FORWARD	WIFI MODULE	PLUGGABLE WIFI MODULE 7668U
RATED IMPEDANCE	6Ω ±15% AT 1000HZ	MULTI-LANGUAGE	SUPPORT
FREQ.RESPONSE	FB-20KHZ/-10DB	FIRMWARE UPDATE	USB,OTA
OUTPUT S.P.L.	0DB-- -10DB	STANDBY MODE	SUPPORT
MAX.POWER OUTPUT	20W*2 (6Ω)	FRONT BUTTON	POWER BUTTONX1
		BACK BUTTON	ROCKER SWITCH FOR POWER UP, DOWN, LEFT, RIGHT, OK, RETURN, MENU
		BOOT TIME	≤35S
		STANDBY TIME	≤5S (WITHOUT OPS)
		OPS-PC SLOT	AVAILABLE
TRANSPORTATION/STORAGE		PORTS	
STORAGE TEMPERATURE/HUMIDITY	15°C ~55°C / 20~90%RH (NON COAGULATION)	FRONT PORT	N/A
WORKING TEMPERATURE/HUMIDITY	0°C ~40°C / 20~80%RH (NON COAGULATION)	REAR INPUT PORT	USB 3.0X4, HDMIX4, USB 3.0 TYPE B (FOR TOUCH, PASSTHROUGH)X1, LAN INX1, RS232X1
INSTALLATION METHOD (OPTIONAL)	WALL-MOUNTED, MOBILE CART	REAR OUTPUT PORT	LAN OUTX1, SPDIF OUTX1, EARPHONEX1
OUTLINE DIMENSION (WITHOUT WALL MOUNT BRACKET THICKNESS) (DECIMAL POINT IS ROUNDED OFF)	1967X1152X87MM		
PACKING DIMENSION (DECIMAL POINT IS ROUNDED OFF)	2101X275X1272MM		
NET WEIGHT	46.5±2KG		
GROSS WEIGHT	64.5±2KG		
VESA MOUNT INSTALLATION POSITION	800 X 400 MM		
CERTIFICATES			
REGULATIONS	BIS, FCC,ROHS, EMC,ERP,LVDS		

BUILT-IN APPS

Everything you need to schedule meetings, manage e-mails, save and open files with the cloud and work on documents, all with Newline's built-in apps. Collaborate locally and remotely, easily



Office Viewer



Business Calendar



Calculator



E-mail



File Commander



Gallery

newline
Connect. Create. Collaborate.

CHENNAI

Door Nos:684 to 690, Unit No 3B2,
10th Floor, Seethakathi Business Centre,
Thousand Lights, Anna Salai,
Chennai - 600 006.

GUJARAT

104, 1st Floor, Shilp Arista, Opposite
Stellar, Sindhu Bhavan Road, Thalthej,
Ahmedabad 380015, Gujarat

DELHI

Unit No. A-717, 7th Floor,
DLF Tower A, Jasola District Centre,
New Delhi- 110025

KOLKATA

RAIKVA Tower 3A, Ram Mohan
Mullick Garden Lane, 3rd Floor, Suit No - 309
Kolkata, West Bengal 700010

MUMBAI

1st Floor,B-107, Kanakia Wall Street,
Chakala, Andheri Kurla Road,
Andheri East Mumbai-400059, Maharashtra.



1-800-419-0309 | www.newlineinteractive.in