


# DV SERIES SMD PLASTIC

## ACTIVE

LED SOLUTION

1.8mm 2.5mm  
Pixel Pitch

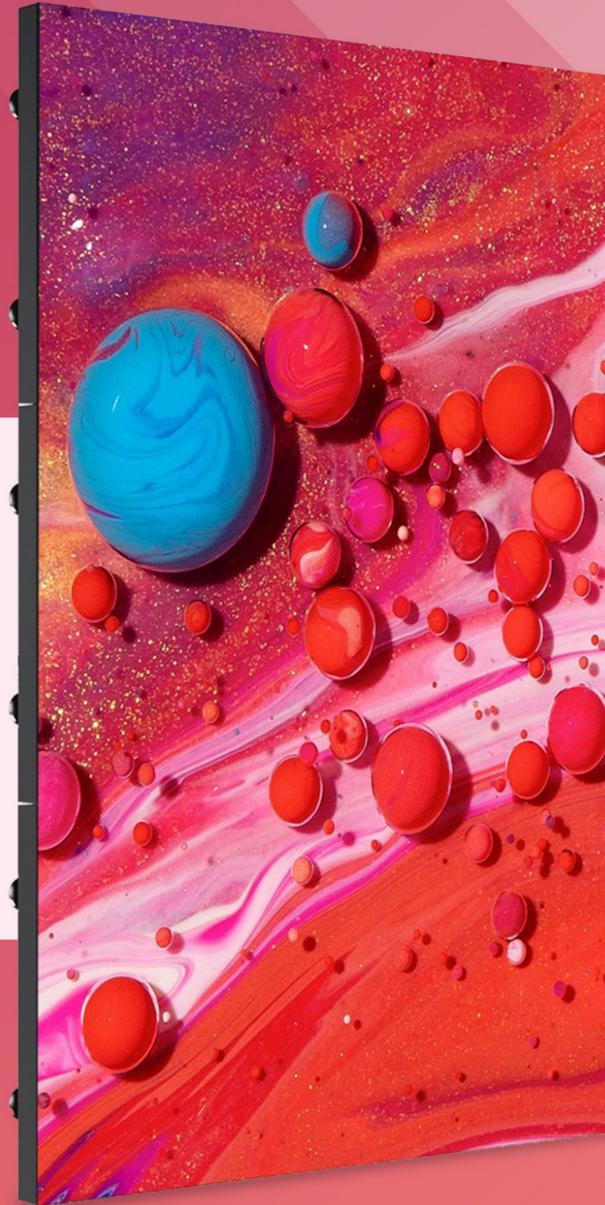

## SMD Technology

SMD (Surface-Mounted Device) technology is the dominant method for active LED displays, packaging Red, Green, and Blue LED chips together onto a single surface-mount component, allowing for high pixel density, superior resolution, wider viewing angles, better color accuracy, and smaller module sizes compared to older DIP (Dual In-line Package) LEDs. This technique places LEDs directly onto a Printed Circuit Board (PCB), enabling compact, efficient, and cost-effective manufacturing for applications from indoor signage to large video walls.

### ✓ High-Resolution SMD LED Technology

Superior image quality with sharp details and vibrant colors

### ✓ Ultra-Slim & Seamless Panel Structure

Ensures flat display surface with minimal gap for perfect visual continuity.

### ✓ High Refresh Rate

Flicker-free display, ideal for video, presentations, and live broadcasting.

### ✓ Front & Rear Serviceability

Easy installation and maintenance, suitable for wall-mounted applications.

### ✓ Excellent Color Uniformity & Grayscale Performance

Flicker-free display, ideal for video, presentations, and live broadcasting.

### ✓ High Brightness & Wide Viewing Angle

Clear visibility even in bright environments with consistent color from all angles.

### ✓ Energy-Efficient & Reliable Operation

Optimized power consumption with stable long-hour performance.

### ✓ Precision Cabinet Flatness & Alignment

Ensures perfect module alignment for premium display quality.

# DV SERIES **SMD** Plastic

Model NO	DVSP - 1.8P	DVSP - 2.5P
Pixel Pitch	1.86mm	2.5mm
LED Type	SMD1515	SMD2121
Module Resolution (W×H)	172×86=14792 Pixels	128×64=8192 Pixels
Pixel density (pixels/sq.m.)	288906 dot/m <sup>2</sup>	160000 dot/m <sup>2</sup>
Module Size (W×H)	320mmx160mm (W×H)	320mmx160mm (W×H)
Cabinet		
Cabinet Size (W×H×D)	320x480x52.6 (mm) (With Module, Kit,Back Cover)	320x480x52.6 (mm) (With Module, Kit,Back Cover)
Cabinet Weight (kg/panel)	2.2±0.1kg	2.2±0.1kg
Maintenance	Full front maintenance	Full front maintenance
Ingress Protection	IP30	IP30
Planeness	≤0.5mm	≤0.5mm
Cabinet Material	Plastic	Plastic
Optical		
Single-dot Brightness Calibration	Support	Support
Brightness	500 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>
Color Temperature	2000K~9300K Adjustable	2000K~9300K Adjustable
Beam Angle (Hor/Ver°)	140°/140°	140°/140°
Brightness/Color Uniformity	≥98%	≥98%
Contrast Ratio	5000:01:00	5000:01:00
Electric		
Input Power <Max>	371 W/m <sup>2</sup>	312 W/m <sup>2</sup>
Input Power <Typical>	124 W/m <sup>2</sup>	104 W/m <sup>2</sup>
Power Supply Input Voltage	AC90~132V/ AC186~264V, Frequency 47-63 (Hz)	AC90~132V/ AC186~264V, Frequency 47-63 (Hz)
Performance		
Frame Changing Frequency	60Hz	60Hz
Refresh Rate	≥4200Hz	≥4200Hz
Processing Depth	12-14Bit	12-14Bit
Video Support	2K, 4K	2K, 4K
Environment		
Life Span (hrs)	100000hrs	100000hrs
Working Temp/Humidity (°C/RH)	-20°C~45° / 10%~50%RH (No Condensation)	-20°C~45°C / 10%~50%RH (No Condensation)
Storage Temp/Humidity (°C/RH)	-20°C~50°C / 10%~60%RH (No Condensation)	-20°C~50°C / 10%~60%RH (No Condensation)

**newline**

 1-800-419-0309  
www.newlineinteractive.in

Chennai

 Door Nos:684 to 690, Unit No 3B2, 10th Floor, Seethakathi Business Centre, Thousand Lights, Anna Salai, Chennai – 600 006.

Gujarat

 104, 1st Floor, Shilp Arista, Opposite Stellar, Sindhu Bhavan Road, Thaltej, Ahmedabad 380015, Gujarat