

newline

Connect. Create. Collaborate.



Android 8.0.0




OPS Slot



Embedded Microphone

NT85

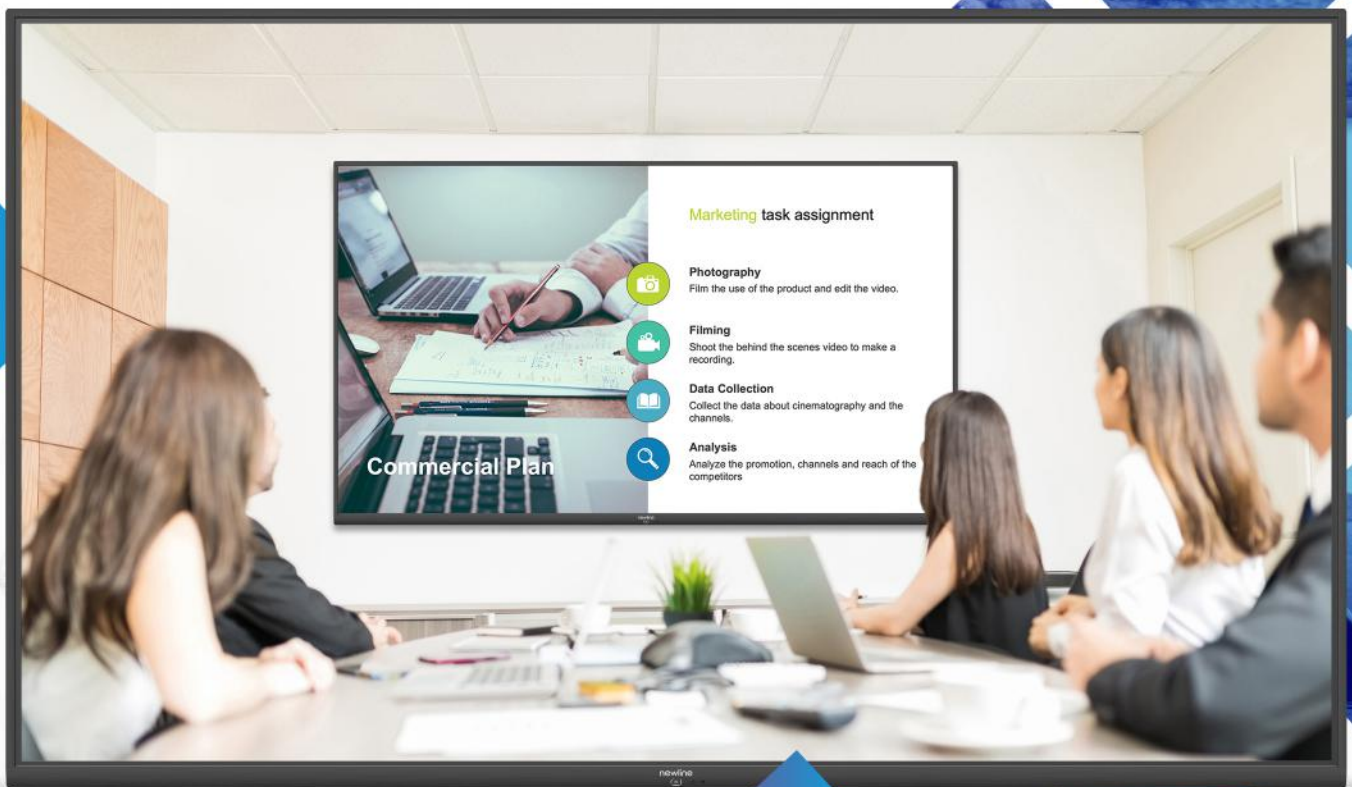

COMMERCIAL GRADE DISPLAYS

CAST

Present wirelessly from any network with a single click.
Share video, links, and files from any device.

BROADCAST

Broadcast content or present wirelessly from a personal device,
and invite up to 200 participants to connect from their own.

PRODUCT SPECIFICATION

DISPLAY	TT-8519NT	INTERNAL MICROPHONE	
ACTIVE SCREEN SIZE	1872X1053MM	CHIPSET	MT8516
PANEL SIZE	85"	COMMUNICATION INTERFACE	USB,LINE-IN
BACKLIGHT	LED	SUPPLY VOLTAGE	18V
DISPLAY AREA	1872X1053MM	TYPE	ANALOG MICROPHONE
DISPLAY RATIO	16:9	AUDIO SPEC.	16KHZ, 16BITS PCM, EXTENDABLE 24BITS, 48BITS
RESOLUTION	3840X2160	ARRAY	6
DISPLAY COLORS	10BIT(D), 1.07BILLON COLORS	ADAPTERIZATION DISTANCE	6~8M
LCD BRIGHTNESS	≥500 CD/M²	FUNCTION	ECHO CANCELLATION, BEAMFORMING, NOISE REDUCTION, REVERB REMOVAL
CONTRAST	5000:1		
RESPONSE TIME	8 MS		
VIEWING ANGLE	178°		
LIFE TIME	≥50000 HOURS		
ELECTRICAL		SMART SYSTEM	
POWER CONSUMPTION	≤450W	CHIPSET	HI3751 V810
WORKING VOLTAGE	AC100-240V	CPU	DUAL-CORE CORTEX A73 AND DUAL-CORE CORTEX A53
		GPU	QUAD-CORE MALIGS1 GPU
		RAM	3GB DDR4
		ROM	16GB
		ANDROID VERSION	8.0
		MULTIMEDIA FILE FORMATS SUPPORT	VIDEO: AVS, AVS+, H263, H264, H265, MPEG-1, MPEG-2, MPEG-4, MPEG-4, VC1, VP8, VP9, MJPEG AUDIO: AAC , ADPCM, DRA, FLAC, MID, MPEG, PCM, VORBIS IMAGE: JPEG , BMP, PNG
SPEAKER		SPECIALITY	
SPEAKER POSITION	FORWARD	WIFI MODULE	PLUGGABLE WIFI MODULE 7668U
RATED IMPEDANCE	6Ω ±15% AT 1000HZ	MULTI-LANGUAGE	SUPPORT
FREQ.RESPONSE	FB-20KHZ/-10DB	FIRMWARE UPDATE	USB,OTA
OUTPUT S.P.L.	0DB~ -10DB	STANDBY MODE	SUPPORT
MAX.POWER OUTPUT	20W*2 (6Ω)	FRONT BUTTON	POWER BUTTONX1
TRANSPORTATION/STORAGE		BACK BUTTON	ROCKER SWITCH FOR POWER UP, DOWN, LEFT, RIGHT, OK, RETURN, MENU
STORAGE TEMPERATURE/HUMIDITY	15°C ~55°C / 20~90%RH (NON COAGULATION)	BOOT TIME	≤35S
WORKING TEMPERATURE/HUMIDITY	0°C ~40°C / 20~80%RH (NON COAGULATION)	STANDBY TIME	≤5S (WITHOUT OPS)
INSTALLATION METHOD (OPTIONAL)	WALL-MOUNTED, MOBILE CART	OPS-PC SLOT	AVAILABLE
OUTLINE DIMENSION (WITHOUT WALL MOUNT BRACKET THICKNESS) (DECIMAL POINT IS ROUNDED OFF)	1967X1152X87MM	PORTS	
PACKING DIMENSION (DECIMAL POINT IS ROUNDED OFF)	2101X275X1272MM	FRONT PORT	N/A
NET WEIGHT	46.5±2KG	REAR INPUT PORT	USB 3.0X4, HDMI4, USB 3.0 TYPE B (FOR TOUCH, PASSTHROUGH)X1, LAN INX1, RS232X1
GROSS WEIGHT	64.5±2KG	REAR OUTPUT PORT	LAN OUTX1, SPDIF OUTX1, EARPONEX1
VESA MOUNT INSTALLATION POSITION	800 X 400 MM		
CERTIFICATES			
REGULATIONS	BIS , FCC,ROHS, EMC,ERP,LVDS		

BUILT-IN APPS

Everything you need to schedule meetings, manage e-mails, save and open files with the cloud and work on documents, all with Newline's built-in apps. Collaborate locally and remotely, easily.



Office View



Business Calendar



Calculator



E-mail



File Commander



Gallery

newline
Connect. Create. Collaborate.

CHENNAI

Room No. 202, 203, 211
No.37, Workafella, TTK Road, Alwarpet,
Chennai-600018, Tamil Nadu

GUJARAT

**104, 1st Floor, Shilp Arista, Opposite
Stellar, Sindhu Bhavan Road, Thaltej,
Ahmedabad 380015, Gujarat**

DELHI

Unit No. A-717, 7th Floor,
DLF Tower A, Jasola District Centre,
New Delhi- 110025

KOLKATA

RAIKVA Tower 3A, Ram Mohan
Mullick Garden Lane, 3rd Floor, Suit No - 309
Kolkata, West Bengal 700010

MUMBAI

1st Floor,B-107, Kanakia Wall Street,
Chakala, Andheri Kurla Road,
Andheri East Mumbai-400059, Maharashtra.



 1-800-419-0309 | www.newlineinteractive.in